


DIN 1471



Conische kerpen
Kegelkerbstift
Grooved pin

Hetraco B.V.

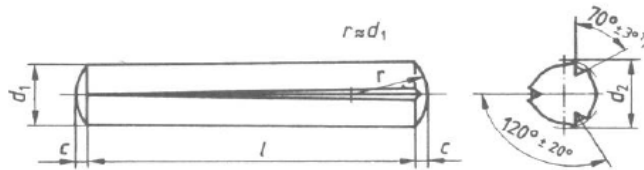

d1	1,5	2	2,5	3	4	5	6	8	10	12	14	16	20	25	
toegestane tolerantie	h9				h11										
c ≈	0,2	0,25	0,3	0,4	0,5	0,63	0,8	1	1,2	1,6	1,6	2	2,5	3	
kN min	1,60	2,85	4,25	6,15	10,6	16,5	22,8	40,5	63,2	91,0	124	156,8	236,5	370,1	
l	d2														
4															
5															
6	1,63			3,25											
8					4,30										
10			2,70			5,30									
12		2,15		3,30			6,30								
16	1,60				4,35			8,35		10,40	12,40				
20						5,35						14,45			
25			2,65	3,25			6,35		8,40				16,55		
30					4,30					10,45	12,45				
35				3,20		5,30						14,50			
40							6,30						16,60		
45								8,35							
50					4,25				10,40						
55						5,25				12,40					
60															
65								6,25				14,45			
70									8,30				16,55		
75															
80									10,35						
90										12,30					
100											14,40		16,50		
110															
120									10,30						
toegestane d2 tolerantie	± 0,05		± 0,05						± 0,1						

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.



Hetraco B.V.

www.hetraco.com ■ hetraco@hetraco.com ■ 055 303 21 80

Hoornaar 11 ■ 7317 BR Apeldoorn ■ Nederland