


DIN 1472



Doorsteek kerfpen
Paßkerbstift
Grooved pin, half length taper grooved

Hetraco B.V.

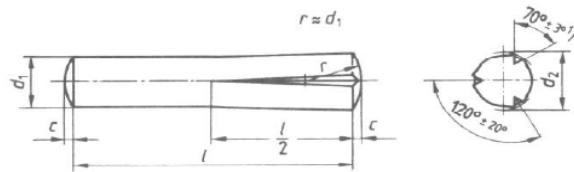

d1	1,5	2	2,5	3	4	5	6	8	10	12	14	16	20	25		
toegestane tolerantie	h9				h11											
c ≈	0,2	0,25	0,3	0,4	0,5	0,6	0,8	1	1,2	1,6	1,6	2	2,5	3		
kN min	1,60	2,85	4,25	6,15	10,6	16,5	22,8	40,5	63,2	91,0	124	156,8	236,5	370,1		
l	d2															
6	1,63	2,15	2,65	3,20												
8																
10								4,25	5,25	6,25	8,25					
12				3,25	4,30	5,30	6,30	8,30	10,30	12,30						
16																
20			2,70													
25				3,30						10,35	12,35	14,40	16,50			
30					4,35											
35																
40				3,25		5,35			10,40	12,40	14,45	16,55	20,50	25,50		
45																
50					4,30		6,35									
55						5,30										
60																
65									10,45	12,45	14,55	16,60				
70																
75							6,30									
80																
80									8,35							
90																
100																
110									10,40	12,40						
120																
140											14,45	16,55				
160									10,35	12,35						
180																
toegestane d2 tolerantie	± 0,05			± 0,05						± 0,1						

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.



Hetraco B.V.

www.hetraco.com ■ hetraco@hetraco.com ■ 055 303 21 80

Hoornaar 11 ■ 7317 BR Apeldoorn ■ Nederland