


DIN 1473



Cilindrische kerpen
Zylinderkerbstift
Grooved pin, full length parallel grooved with chamfer

Hetraco B.V.

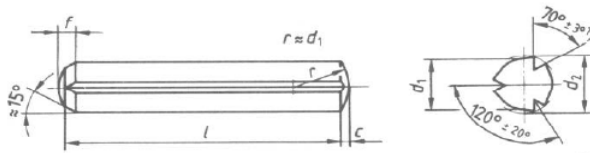

d1	0,8	1	1,2	1,5	2	2,5	3	4	5	6	8	10	12	14	16	20	25
toegestande tolerantie	h9							h11									
c ≈	0,1	0,12	0,16	0,2	0,25	0,3	0,4	0,5	0,6	0,8	1	1,2	1,6	1,6	2	2,5	3
f ≈	0,55	0,57	0,6	0,8	0,9	1,2	1,3	1,8	2	2,5	2,8	3,5	3,7	4	4,3	5,2	6
kN min	0,45	0,70	1,00	1,60	2,85	4,25	6,15	10,6	16,5	22,8	40,5	63,2	91,0	124	156,8	236,5	370,1
l	d2																
4																	
5																	
6	0,83																
8		1,05															
10			1,25														
12				1,60													
16					2,15												
20						2,65											
25							3,20										
30								4,25									
35									5,25								
40										6,30							
45											8,30						
50												10,35					
55													12,35				
60														14,35			
65															16,40		
70																20,50	
75																	25,50
80																	
90																	
100																	
110																	
120																	
toegestande d2 tolerantie	± 0,05					± 0,05						± 0,1					

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.



Hetraco B.V.

www.hetraco.com ■ hetraco@hetraco.com ■ 055 303 21 80

Hoornaar 11 ■ 7317 BR Apeldoorn ■ Nederland