


DIN 1474



Insteekkerfpen
Zylinderkerbstift
Grooved pin, half length reverse grooved

Hetraco B.V.

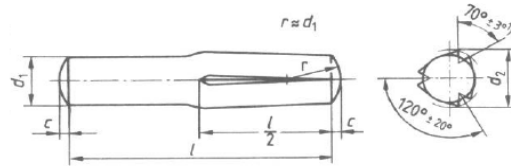

d1	1,5	2	2,5	3	4	5	6	8	10	12	14	16	20	25	
toegestane tolerantie	h9				h11										
c ≈	0,2	0,25	0,3	0,4	0,5	0,63	0,8	1	1,2	1,6	1,6	2	2,5	3	
kN min	160	285	4,25	6,15	10,6	16,5	22,8	40,5	63,2	91,0	124	156,8	236,5	370,1	
l	d2														
6															
8	1,60														
10		2,10	2,60	3,10											
12					4,15	5,15									
16	1,63		2,65	3,15	4,20	5,20	6,15	8,20							
20							6,25								
25		2,15		3,20				8,25	10,20						
30			2,70		4,25	5,25		8,30		12,25	14,25	16,25	20,25	25,25	
35				3,25			6,30		10,30						
40								8,35		12,30	14,30	16,30			
45													20,30	25,30	
50					4,30	5,30	6,35		10,40		12,40	14,40	16,40		
55														20,40	
60								8,40							
65									10,45						
70															
75															
80											12,50	14,50	16,50		
90								8,35						20,50	
100														25,50	
110															
120									10,40						
140															
160											12,45	14,45	16,45		
180													20,45	25,45	
toegestane d2 tolerantie	± 0,05		± 0,05						± 0,1						

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.



Hetraco B.V.

www.hetraco.com ■ hetraco@hetraco.com ■ 055 303 21 80

Hoornaar 11 ■ 7317 BR Apeldoorn ■ Nederland