


# DIN 1475



Gaffelkerpen  
Knebelkerbstift  
Grooved pin, third length center grooved

## Hetraco B.V.

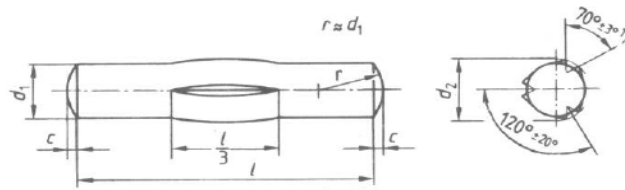

d1	1,5	2	2,5	3	4	5	6	8	10	12	14	16	20	25	
toegestane tolerantie	h9				h11										
c ≈	0,2	0,25	0,3	0,4	0,5	0,6	0,8	1	1,2	1,6	1,6	2	2,5	3	
kN/min	1,60	2,85	4,25	6,15	10,6	16,5	22,8	40,5	63,2	91,0	124	156,8	236,5	370,1	
l	d2														
8															
10	1,60														
12															
16															
20	1,63	2,10	2,60	3,10											
25															
30															
35															
40															
45															
50															
55															
60															
65															
70															
75															
80															
90															
100															
110															
120															
140															
160															
180															
toegestane d2 tolerantie	± 0,05		± 0,05						± 0,1						

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.



# Hetraco B.V.

www.hetraco.com ■ hetraco@hetraco.com ■ 055 303 21 80

Hoornaar 11 ■ 7317 BR Apeldoorn ■ Nederland