


DIN 1476



Hetraco B.V.

Bolkopkernagel
Halbrundkernagel
Grooved pin, third length center grooved

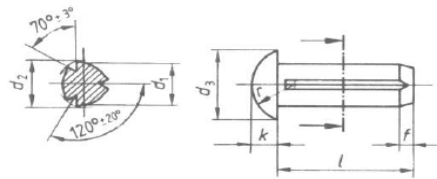

d1	1,4	1,6	2	2,5	3	4	5	6	8	10	12	16	20		
toegestane tolerantie	0 - 0,05			0 - 0,075		0 - 0,10			0 - 0,15		0 - 0,20				
d3	2,4	2,8	3,5	4,4	5,2	7	8,8	10,5	14	16	19	25	32		
toegestane tolerantie	±0,2				±0,25		±0,3		±0,4	0 - 1,1	0 - 1,3				
k	0,8	1	1,2	1,5	1,8	2,4	3	3,6	4,8	6,5	7,5	10	13		
toegestane tolerantie	±0,1				±0,15				±0,2	+0,9 - 0					
r ≈	1,4	1,6	1,9	2,4	2,8	3,8	4,6	5,7	7,5	8	9,5	13	16,5		
f ≈	0,5			0,7	1	1,5		2		2,5			3		
l	d2														
3															
4	1,50	1,70													
5			2,15	2,70											
6						3,20									
8							4,25								
10								5,25							
12									6,30						
16										8,30					
20											10,35				
25												12,35			
30													16,40		
35														20,50	
40															
toegestane tolerantie	± 0,05			± 0,05						±0,1					

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.



Hetraco B.V.

www.hetraco.com ■ hetraco@hetraco.com ■ 055 303 21 80

Hoornaar 11 ■ 7317 BR Apeldoorn ■ Nederland