


DIN 1479



Hetraco B.V.

Zeskant spanschroefmoer
 Sechskant-Spannschloßmutter
 Hexagon Turnbuckle nut

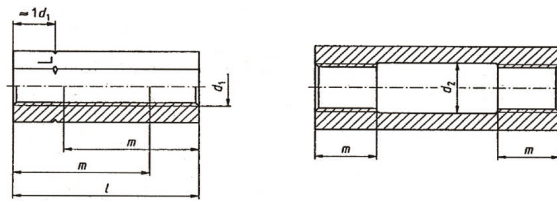

d1	M6	M8	M10	M12	M16	M20	M24	M30
d2 ≈	-	-	-	-	-	21	26	32
l	30	35	45	55	75	95	115	125
max.	30,5	35,8	45,8	55,8	75,8	95,8	115,8	126,2
min.	29,5	34,2	44,2	54,2	74,2	94,2	114,2	123,8
m ≈	22,5	25	33	40	55	24	29	36
sleutelwijdte	10	13	16a	18a	24	30	36	46
min.	9,78	12,73	15,73	17,73	23,67	29,16	35	45
Verstelbaarheid	15	15	21	25	35	47	57	53

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.



Hetraco B.V.

www.hetraco.com ■ hetraco@hetraco.com ■ 055 303 21 80

Hoornaar 11 ■ 7317 BR Apeldoorn ■ Nederland