


# DIN 258



Kegeldraadeind  
Kegelstift mit Gewindezapfen  
Taper pin threaded ends

**Hetraco B.V.**

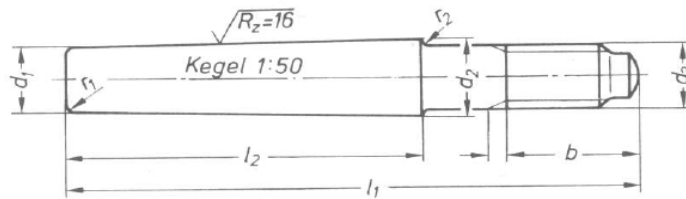

d1	5	6	8	10	12	14	16	20	25	30	40	50
b	14	18	22	24	27	30	35	35	40	46	58	70
d2 ≈	5,5	6,6	8,8	10,9	13,1	15,3	17,4	21,7	27	32,2	42,6	53
d3	M5	M6	M8	M10	M12	M12	M16	M16	M20	M24	M30	M36
l2	25	30	40	45	55	65	72	85	100	110	130	150
r1 ≈	0,3	0,4	0,4	0,5	0,6	0,6	0,8	0,8	1	1	1,2	1,6
r2 ≈	0,6	0,6	0,6	1	1	1	1,6	1,6	1,6	2,5	2,5	4

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.



**Hetraco B.V.**

[www.hetraco.com](http://www.hetraco.com) ■ [hetraco@hetraco.com](mailto:hetraco@hetraco.com) ■ 055 303 21 80

Hoornaar 11 ■ 7317 BR Apeldoorn ■ Nederland