


DIN 478



Hetraco B.V.

Vierkantbout met kraag
 Vierkantschraube mit Kernansatz
 Square head bolt with collar

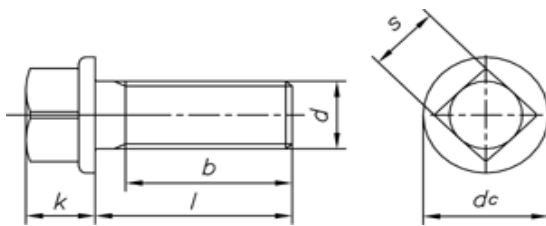

		d	Schroefdraad	M5	M6	M8	M10	M12	M16	M20	M24
b	$l \leq 125\text{mm}$	16		18	22	26	30	38	46	54	
	$l \geq 125\text{mm}$	-		-	-	32	36	44	52	60	
dc	max. = maat	9,5		10,5	13,5	16,5	19,5	25	31	36	
	min.	8,92		9,8	12,8	15,8	18,66	24,16	30	35	
k	maat	7		8	10	13	15	20	25	28	
	min.	6,82		7,82	9,82	12,78	14,78	19,74	24,74	27,74	
s	max. = max.	5		6	8	10	13	16	17	21	24
	min.	4,82		5,82	7,78	9,78	12,73	15,73	16,73	20,67	21,67
l											
maat	min	max.									
10	9,71	10,29									
16	15,65	16,35									
20	19,58	20,42									
25	24,58	25,42									
30	29,58	30,42									
35	34,5	35,5									
40	39,5	40,5									
45	44,5	45,5									
50	49,5	50,5									
0,55	54,4	55,6									
60	59,4	60,6									
70	69,4	70,6									
80	79,4	80,6									
90	89,3	90,7									
100	99,3	100,7									
110	109,3	110,7									
120	119,3	120,7									
140	139,2	140,8									
160	159,2	160,8									
180	179,2	180,8									

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.