


DIN 479



Vierkantbout met tap
 Vierkantschraube mit Kernansatz
 Square head bolt with short dog point

Hetraco B.V.

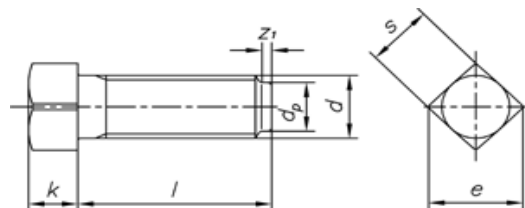

d	Schroefdraad	M5	M6	M8	M10	M12	M16	M20	M24
dp	max. maat	3,5	4	5,5	7	8,5	12	15	18
	min.	3,32	3,82	5,32	6,78	8,28	11,73	14,73	17,73
e	max. = maat	6,5	8	10	13	17	21	22	28
	min.	5,92	7,42	9,42	12,3	16,3	20,16	21,16	26,16
k	maat	5	6	8	10	12	16	20	22
	min.	4,85	5,85	7,82	9,82	11,79	15,79	19,74	21,74
s	max.	5,15	6,15	8,18	10,18	12,21	16,21	20,26	22,26
	min.			8	10	13	16	17	21
z1	max. = maat	4,82	5,82	7,78	9,78	12,73	15,73	16,73	20,67
	min.	1,25	1,5	2	2,5	3	4	5	6
	max	1,5	1,75	2,25	2,75	3,25	4,3	5,3	6,3

maat	min	max.
8	7,71	8,29
10	9,71	10,29
16	15,65	16,35
20	19,58	20,42
25	24,58	25,42
30	29,58	30,42
35	34,5	35,5
40	39,5	40,5
45	44,5	45,5
50	49,5	50,5
55	54,4	55,6
60	59,4	60,6
70	69,4	70,6
80	79,4	80,6
90	89,3	90,7
100	99,3	100,7
110	109,3	110,7
120	119,3	120,7
140	139,2	140,8

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.



Hetraco B.V.

www.hetraco.com ■ hetraco@hetraco.com ■ 055 303 21 80

Hoornaar 11 ■ 7317 BR Apeldoorn ■ Nederland