


DIN 480



Vierkantbout met tap
 Vierkantschraube mit Bund
 Square head bolt with half dog point

Hetraco B.V.

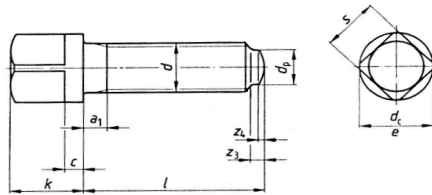

d	Schroefdraad	M 8	M 10	M 12	M 16	M 20	M 24		
a1	max.	4	4,5	5,3	6	7,5	9		
c	min.	2,88	2,88	3,85	3,85	4,85	5,85		
	max.	3,12	3,12	4,15	4,15	5,15	6,15		
dc	max. = maat	10	13	17	21	22	27	28	32
	min.	9,42	12,3	16,3	20,16	21,16	26,16	27,16	31
dp	max. = maat	5,5	7	8,5	12	15	18		
	min.	5,32	6,78	8,28	11,73	14,73	17,73		
k	maat	11	13	16	20	25	28		
	min.	10,78	12,78	15,78	19,74	24,74	27,74		
	max.	11,22	13,22	16,22	20,26	25,26	28,26		
s	max. = maat	8	10	13	16	17	21	22	24
	min.	7,78	9,78	12,73	15,73	16,73	20,67	21,67	23,67
z3	min. = maat	2	2,5	3	4	5	6		
	max.	2,25	2,75	3,25	4,3	5,3	6,3		
z4	≈	1	1	1,25	1,75	2	2,5		
l									
maat	min.	max.							
16	15,65	16,35							
20	19,58	20,42							
25	24,58	25,42							
30	29,58	30,42							
35	34,5	35,5							
40	39,5	40,5							
50	49,5	50,5							
60	59,4	60,6							
70	69,4	70,6							
80	79,4	80,6							
90	89,3	90,7							
100	99,3	100,7							
110	109,3	110,7							
120	119,3	120,7							
140	139,2	140,8							

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.



Hetraco B.V.

www.hetraco.com ■ hetraco@hetraco.com ■ 055 303 21 80

Hoornaar 11 ■ 7317 BR Apeldoorn ■ Nederland