


DIN 604



Hetraco B.V.

Bout met verzonken kop en nok
Senkschraube mit Nase
Flat countersunk nib bolt

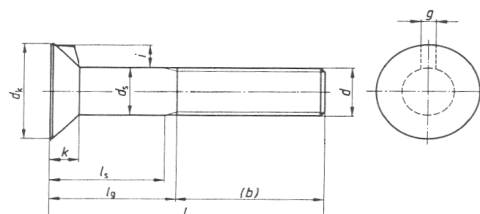

d			M 6	M 8	M 10	M 12	M 16	M 20	M 24
b	$l \leq 125 \text{ mm}$		18	22	26	30	38	46	54
	$125 < l \leq 200 \text{ mm}$		24	28	32	36	44	52	60
	$l > 200 \text{ mm}$		-	41	45	49	57	65	73
dk	max.		12,55	16,55	19,65	24,65	32,8	32,8	38,8
	min.		11,45	15,45	18,35	23,35	31,2	31,2	37,2
ds	max.		6	8	10	12	16	20	24
	min.		5,52	7,42	9,42	11,3	15,3	19,16	23,16
g	max.		2,5	3	3,2	3,6	4,2	5,4	6,6
	min.		2,1	2,6	2,72	3,12	3,72	4,92	6,02
i	min.		2,8	3,5	4,2	5,7	7,5	5,7	6,7
k			4	5	5,5	7	9	11,5	13

l																
maat	min.	max.	ls min.	lg max.	ls min.	lg max.	ls min.	lg max.	ls min.	lg max.	ls min.	lg max.	ls min.	lg max.	ls min.	lg max.
20	18,95	21,05														
25	23,95	26,05														
30	28,95	31,05														
35	33,75	36,25														
40	38,75	41,25														
45	43,75	46,25														
50	48,75	51,25														
55	53,5	56,5														
60	58,5	61,5														
65	63,5	66,5														
70	68,5	71,5														
80	78,5	81,5														
90	88,25	91,75														
100	98,25	101,75														
110	108,25	111,75														
120	118,25	121,75														
130	128	132														
140	138	142														
150	148	152														
160	156	164														



Hetraco B.V.

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.

www.hetraco.com ■ hetraco@hetraco.com ■ 055 303 21 80

Hoornaar 11 ■ 7317 BR Apeldoorn ■ Nederland