


# DIN 605



Verzonken slotbout met vierkante nek  
 Senkschraube mit hohem Vierkantansatz  
 Flat countersunk square neck bolt (long square)

## Hetraco B.V.

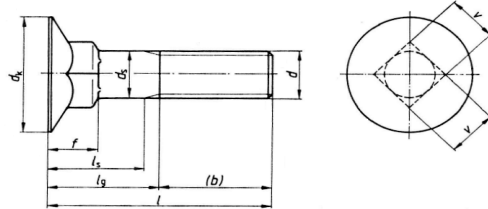

d		M 6	M 8	M 10
b	$l \leq 125$	18	22	26
	$125 < l \leq 200 \text{ mm}$	24	28	32
	$l > 200 \text{ mm}$	-	41	45
dk	max.	16,55	20,65	24,65
	min.	15,45	19,35	23,35
ds	max.	6	8	10
	min.	5,52	7,42	9,42
f	max.	7,45	9,45	11,55
	min.	6,55	8,55	9,45
v	max.	6,48	8,58	10,58
	min.	5,52	7,42	9,42

maat	l							
	min.	max.	ls min.	lg max.	ls min.	lg max.	ls min.	lg max.
30	28,95	31,05						
35	33,75	36,25						
40	38,75	41,25						
45	43,75	46,25						
50	48,75	51,25						
55	53,5	56,5						
60	58,5	61,5						
65	63,5	66,5						
70	68,5	71,5						
80	78,5	81,5						
90	88,75	91,75						
100	98,25	101,75						

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.