


# DIN 608



**Hetraco B.V.**

Slotbout met verzonken kop met laag vierkant  
 Senkschraube mit niedrigem Vierkantansatz  
 Flat countersunk square neck bolt (short square)

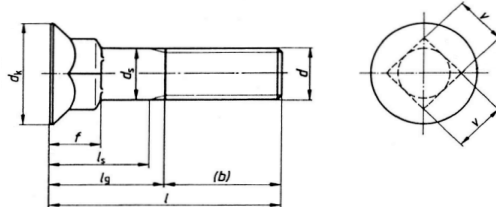

		d	M 10	M 12		
b			26	30		
dk	max.		19,65	24,65		
	min.		18,35	23,35		
ds	max.		10	12		
	min.		9,42	11,3		
f	max.		8,45	11,05		
	min.		7,55	9,95		
v	max.		10,58	12,7		
	min.		9,42	11,3		
l						
maat	min.	max.	ls min.	lg max.	ls min.	lg max.
25	23,95	26,05				
30	28,95	31,05				
35	33,75	36,25				
40	38,75	41,25				
45	43,75	46,25				
50	48,75	51,25				

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.