


DIN 6325



Cilindrische pen, gehard (geslepen)
 Zylinderstift durchgehärtet (geschliffen)
 Parallel pin, hardened (polished)

Hetraco B.V.

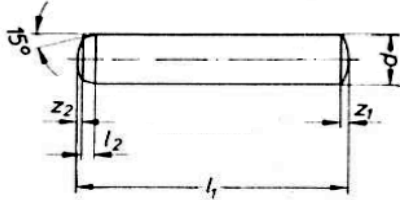

d	0,8	1	1,5	2	2,5	3	4	5	6	8	10	12	14	16	20
l2	0,4	0,4	0,5	0,6	0,7	0,8	1	1,2	1,5	1,8	2	2,5	2,5	3	4
z1 ≈	0,12	0,15	0,23	0,3	0,4	0,45	0,6	0,75	0,9	1,2	1,5	1,8	2	2,5	3
z2 ≈	0,06	0,08	0,12	0,18	0,25	0,3	0,4	0,5	0,6	0,8	1	1,3	1,3	1,7	2

l	0,8	1	1,5	2	2,5	3	4	5	6	8	10	12	14	16	20
2															
3															
4															
5															
6															
8															
10															
12															
14															
16															
18															
20															
24															
28															
32															
36															
40															
45															
50															
55															
60															
70															
80															
90															
100															
120															

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.