

DIN6915




HV-voorspanmoer

Sechskantmutter mit großen Schlüsselweiten für Verbindungen mit HV-Schrauben

Hexagon nuts with large widths across flats for high strength structural bolting

Hetraco B.V.

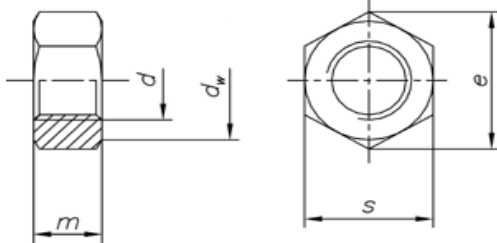

d		M12	M16	M20	M22	M24	M27	M30	M36
dw	min.	20	25	30	34	39	43,5	47,5	57
e	min.	23,91	29,56	35,03	39,55	45,20	50,85	55,37	66,44
m	max.=maat	10	13	16	18	20	22	24	29
	min.	9,64	12,3	14,9	16,9	18,7	20,7	22,7	27,7
s	max.=maat	22	27	32	36	41	46	50	60
	min.	21,16	26,16	31	35	40	45	49	58,8

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.



Hetraco B.V.

www.hetraco.com ■ hetraco@hetraco.com ■ 055 303 21 80

Hoornaar 11 ■ 7317 BR Apeldoorn ■ Nederland