


# DIN6916



HV Sluitring  
Scheibe rund für HV-Schrauben in Stahlkonstruktionen  
Round washer for high-tensile structural bolting

## Hetraco B.V.

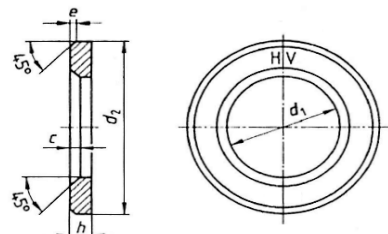

Maat	tbv Schroefdraad	d1		d2		h			c		e
		min.= maat	max.	max.=m maat	min.	maat	max.	min.	min.= maat	max.	≈
13	M 12	13	13,27	24	23,48	3	3,3	2,7	1,6	1,9	0,5
17	M 16	17	17,27	30	29,48	4	4,3	3,7	1,6	1,9	1
21	M 20	21	21,33	37	36,38	4	4,3	3,7	2	2,5	1
23	M 22	23	23,33	39	38,38	4	4,3	3,7	2	2,5	1
25	M 24	25	25,33	44	43,38	4	4,3	3,7	2	2,5	1
28	M 27	28	28,52	50	49	5	5,6	4,4	2,5	3	1
31	M30	31	31,62	56	54,8	5	5,6	4,4	2,5	3	1
37	M 36	37	37,62	66	64,8	6	6,6	5,4	3	3,5	1,5



Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.

# Hetraco B.V.

www.hetraco.com ■ hetraco@hetraco.com ■ 055 303 21 80

Hoornaar 11 ■ 7317 BR Apeldoorn ■ Nederland