


DIN6924



Hetraco B.V.

Zelfborgende zeskantmoer met kunststof borgring
 Sechskantmutter mit Polyamidklemmteil
 Prevailing torque type hexagon nut (with non metallic insert)

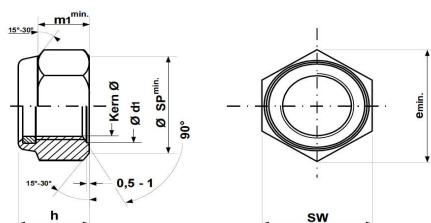

	SW	h	KernØ	min. m1	min. ØSP	Ød1
M 16	24,00	19,10	14,210	14,1	22,5	17,3
	23,67	18,26	13,835			16,0
M 18	27,00	20,60	15,744	15,1	24,9	19,5
	26,16	19,76	15,294			18,0
M 20	30,00	22,80	17,744	16,9	27,7	21,6
	29,16	21,50	17,294			20,0
M 22	34,00	24,50	19,744	18,1	31,4	23,7
	33,00	23,20	19,294			22,0
M 24	36,00	27,10	21,252	20,2	33,2	25,9
	35,00	25,80	20,752			24,0
M 27	41,00	31,00	24,252	22,5	38,0	29,1
	40,00	29,40	23,752			27,0
M 30	46,00	32,60	26,771	24,3	42,7	32,4
	45,00	31,00	26,221			30,0
M 33	50,00	35,50	29,771	27,4	46,6	35,6
	49,00	33,90	29,211			33,0
M 36	55,00	38,90	32,270	29,4	51,1	38,9
	53,80	37,30	31,670			36,0
M 39	60,00	42,00	35,270	31,8	55,9	42,1
	58,80	40,40	34,670			39,0
M 42	65,00	45,00	37,799	34,0	59,9	45,4
	63,10	43,40	37,129			42,0
M 45	70,00	48,00	40,799	36,0	64,7	48,6
	68,10	46,40	40,129			45,0
M 48	75,00	50,00	43,297	38,0	69,4	51,8
	73,10	48,40	42,587			48,0

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.



Hetraco B.V.

www.hetraco.com ■ hetraco@hetraco.com ■ 055 303 21 80

Hoornaar 11 ■ 7317 BR Apeldoorn ■ Nederland