


DIN787



T-Gleufbout
T-Nutenschraube
T-Slot bolt

Hetraco B.V.

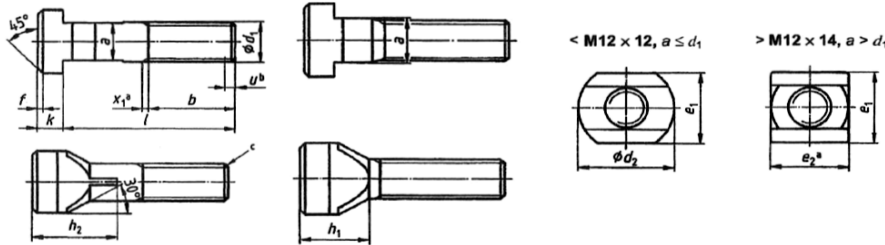

d1 mm	a mm	a tolerantie mm	l mm	b mm	d2 mm	e1 mm	e1 tolerantie mm	f mm	h1 mm	h2 mm	k mm	k tolerantie mm	Voor T-blok volgens DIN 650						
M5	5	-0,3 -0,5	25	18	10	9	0 -0,5	1	6,5	10	3	2 -0,3	5						
			40	30															
M6	6			25	15			12	10	1,6	8	13	4	0 -0,5	6				
			40	28															
M8	8			63	40			16	13	1,6	12	18	6	0 -0,5	8				
			32	22															
		50	35																
M10	10		80	50	20	15	1,6	14	21	6	0 -0,5	10							
		40	30																
		63	45																
M12	12	-0,3 -0,6	100	60	25	18	0 -0,5	2,5	16	25	7	0 -0,5	12						
			50	35															
			80	55															
	14			200	120	28	22	2,5	20	—	8	0 -0,5	14						
			50	35															
			80	55															
M16	18			125	75	36	28	2,5	24	—	10	0 -0,5	18						
			63	45															
			100	63															
M20	22			160	100	45	35	2,5	32	—	14	0 -0,5	22						
			250	150															
			80	55															
M24	28		125	85	56	44	4	41	—	18	0 -0,5	28							
		200	125																
		315	190																
M30	36	-0,4 -0,8	100	70	70	54	0 -1	—	50	—	22	0 -1	36						
			160	110															
			250	150															
			315	240															
			125	80															
			20	135															
M36	42		3015	200	82	65	—	60	—	26	0 -1	42							
		500	300																
		160	100																
M42	48		250	175	95								75	—	70	—	30	0 -1	48
		400	250																
		160	100																
M48	54	-0,4 -0,8	250	175	110	85	—	80	—	34	0 -1	54							
		400	250																
		200	130																
		315	220																
		500	300																

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.