


DIN7991



Platverzonken inbusschroef
Senkschrauben mit Innensechskant
Hexagon socket countersunk head screws

Hetraco B.V.

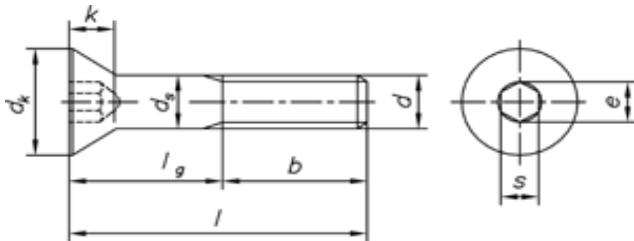

Schroefdraad	M3	M4	M5	M6	M8	M10	M12	M14	M16	M 18	M 20	M22	M 24
spoed	0,5	0,7	0,8	1	1,25	1,5	1,75	2	2	2,5	2,5	2,5	3
b	$l \leq 125\text{mm}$	12	14	16	18	22	26	30	34	38	42	46	50
	$125\text{mm} > l \leq 200\text{mm}$	-	-	-	24	28	32	36	40	44	48	52	56
	$l > 200\text{mm}$	-	-	-	-	-	45	49	53	57	61	65	69
dk	max.=maat	6	8	10	12	16	20	24	27	30	33	36	39
	min	5,7	7,64	9,64	11,57	15,57	19,48	23,48	26,48	29,48	32,38	35,38	38,38
ds	max.=maat	3	4	5	6	8	10	12	14	16	18	20	22
	min.	2,86	3,82	4,82	5,82	7,78	9,78	11,73	13,73	15,73	17,73	19,67	21,67
e	2,3	2,87	3,44	4,58	5,72	6,86	9,15	11,43	11,43	13,72	13,72	16	16
k	1,7	2,3	2,8	3,3	4,4	5,5	6,5	7	7,5	8	8,5	13,1	14
s	maat	2	2,5	3	4	5	6	8	10	10	12	12	14
	min	2,02	2,52	3,02	4,02	5,02	6,02	8,025	10,025	10,025	12,032	12,032	14,032
	max	2,10	2,60	3,10	4,12	5,14	6,14	8,175	10,175	10,175	12,212	12,212	14,212

maat	l		
	min	max.	
8	7,71	8,29	
10	9,71	10,29	
12	11,65	12,35	
16	15,65	16,35	
20	19,58	20,42	
25	24,58	25,42	
30	29,58	30,42	
35	34,5	35,5	
40	39,5	40,5	
50	49,5	50,5	
60	59,4	60,6	
70	69,4	70,6	
80	79,4	80,6	
90	89,3	90,7	
100	99,3	100,7	

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.