


DIN913



Stelschroef met binnenzeskant en afschuiving
 Gewindestifte mit Kegelkuppe mit Innensechskant
 Hexagon socket set screw with flat point

Hetraco B.V.

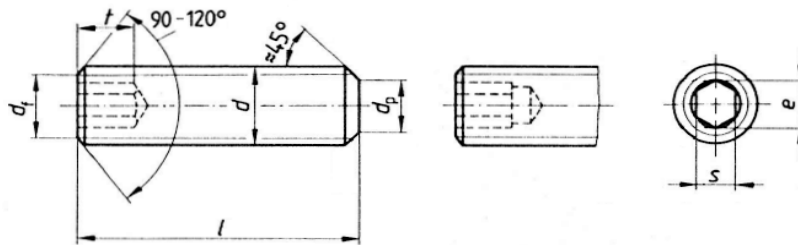

d		M1,4	M1,6	(M 1,8)	M2	M2,5	M3	M4	M5	M6	M8	M10	M12	(M14)	M16	(M18)	M20	(M22)	M24
dp	max.	0,7	0,8	0,9	1	1,5	2	2,5	3,5	4	5,5	7	8,5	10	12	13	15	17	18
	min.	0,45	0,55	0,65	0,75	1,25	1,75	2,25	3,2	3,7	5,2	6,64	8,14	9,64	11,57	12,57	14,57	16,57	17,57
e	min.	0,803	0,803	0,803	1,003	1,427	1,73	2,30	2,87	3,44	4,58	5,72	6,86	6,86	9,15	11,43	11,43	13,72	13,72
s	maat	0,7	0,7	0,7	0,9	1,3	1,5	2	2,5	3	4	5	6	6	8	10	10	12	12
	min.	0,711	0,711	0,711	0,889	1,27	1,52	2,02	2,52	3,02	4,02	5,02	6,02	6,02	8,025	10,025	10,025	12,032	12,032
t	min.	0,724	0,724	0,724	0,902	1,295	1,545	2,045	2,56	3,08	4,095	5,095	6,095	6,095	8,115	10,115	10,115	12,142	12,142
	max.	0,6	0,7	0,8	0,8	1,2	1,2	1,5	2	2	3	4	4,8	5,6	6,4	7,2	8	9	10
l	maat	1,4	1,5	1,6	1,7	2	2	2,5	3	3,5	5	6	8	9	10	11	12	13,5	15
	min. max.																		
2	1,80	2,20																	
2,5	2,30	2,70																	
3	2,80	3,20																	
(3,5)	3,26	3,74																	
4	3,76	4,24																	
5	4,76	5,24																	
6	5,76	6,24																	
8	7,71	8,29																	
10	9,71	10,29																	
12	11,65	12,35																	
(14)	13,65	14,35																	
16	15,65	16,35																	
(18)	17,65	18,35																	
20	19,58	20,42																	
(22)	21,58	22,42																	
25	24,58	25,42																	
(28)	27,58	28,42																	
30	29,58	30,42																	
35	34,5	35,5																	
40	39,5	40,5																	
45	44,5	45,5																	
50	49,5	50,5																	
55	54,4	55,6																	
60	59,4	60,6																	

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.