


DIN916



Stelschroef met binnenzeskant en kratereind
 Gewindestifte met Innensechskant und Ringschneide
 Hexagon socket set screw with cup point

Hetraco B.V.

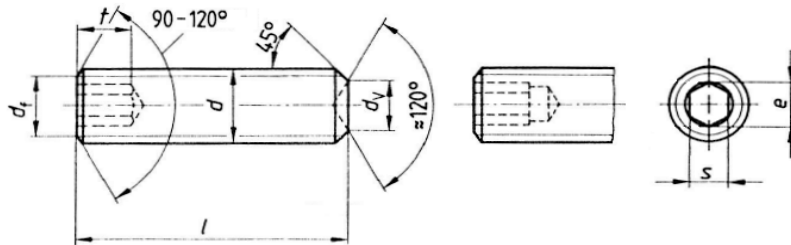

d		M1,4	M1,6	(M 1,8)	M2	M2,5	M3	M4	M5	M6	M8	M10	M12	(M14)	M16	(M18)	M20	(M22)	M24		
d _v	max.	0,7	0,8	0,9	1	1,2	1,4	2	2,5	3	5	6	8	9	10	12	14	16	16		
	min.	0,45	0,55	0,65	0,75	0,95	1,15	1,75	2,25	2,75	4,7	5,7	7,64	8,64	9,64	11,57	13,57	15,57	15,57		
e	min.	0,803	0,803	0,803	1,003	1,427	1,73	2,30	2,87	3,44	4,58	5,72	6,86	6,86	9,15	11,43	11,43	13,72	13,72		
s	maat	0,7	0,7	0,7	0,9	1,3	1,5	2	2,5	3	4	5	6	6	8	10	10	12	12		
	min.	0,711	0,711	0,711	0,889	1,27	1,52	2,02	2,52	3,02	4,02	5,02	6,02	6,02	8,025	10,025	10,025	12,032	12,032		
	max.	0,724	0,724	0,724	0,902	1,295	1,545	2,045	2,56	3,08	4,095	5,095	6,095	6,095	8,115	10,115	10,115	12,142	12,142		
t		0,6	0,7	0,8	0,8	1,2	1,2	1,5	2	2	3	4	4,8	5,6	6,4	7,2	8	9	10		
		1,4	1,5	1,6	1,7	2	2	2,5	3	3,5	5	6	8	9	10	11	12	13,5	15		
l																					
maat	min.	max.																			
2	1,80	2,20																			
2,5	2,30	2,70																			
3	2,80	3,20																			
(3,5)	3,26	3,74																			
4	3,76	4,24																			
5	4,76	5,24																			
6	5,76	6,24																			
8	7,71	8,29																			
10	9,71	10,29																			
12	11,65	12,35																			
(14)	13,65	14,35																			
16	15,65	16,35																			
(18)	17,65	18,35																			
20	19,58	20,42																			
(22)	21,58	22,42																			
25	24,58	25,42																			
(28)	27,58	28,42																			
30	29,58	30,42																			
35	34,5	35,5																			
40	39,5	40,5																			
45	44,5	45,5																			
50	49,5	50,5																			
55	54,4	55,6																			
60	59,4	60,6																			

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.