

DIN 607




Hetraco B.V.

Bolkop nokbout

Halbrundschrauben mit Nase

Cup head nib bolt (cup nib bolt)

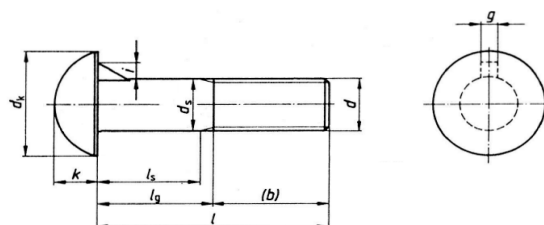

d	M 8	M 10	M 12	M 16
b				
$l \leq 125 \text{ mm}$	22	26	30	38
$125 < l \leq 200 \text{ mm}$	28	32	36	44
$l > 200 \text{ mm}$	-	-	-	57
dk				
max.	16,55	19,65	24,65	30,65
min.	15,45	18,35	23,35	29,35
ds				
max.	8	10	12	16
min.	7,42	9,42	11,3	15,3
g				
max.	3	3,2	3,6	4,2
min.	2,6	2,72	3,12	3,72
i				
min.	2,3	2,7	3,2	3,5
k				
max.	6,38	7,45	9,65	11,75
min.	5,62	6,55	8,75	10,65

l										
maat	min.	max.	ls min.	lg max.	ls min.	lg max.	ls min.	lg max.	ls min.	lg max.
16	15,1	16,9								
20	18,95	21,05								
25	23,95	26,05								
30	28,95	31,05								
35	33,75	36,25								
40	38,75	41,25								
45	43,75	46,25								
50	48,75	51,25								
55	53,5	56,5								
60	58,5	61,5								
65	63,5	66,5								
70	68,5	71,5								
80	78,5	81,5								
90	88,25	91,75								
100	98,25	101,75								
110	108,25	111,75								
120	118,25	121,75								
130	128	132								
140	138	142								
150	148	152								
160	156	164								



Hetraco B.V.

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.

www.hetraco.com ■ hetraco@hetraco.com ■ 055 303 21 80

Hoornaar 11 ■ 7317 BR Apeldoorn ■ Nederland