


DIN6912



Hetraco B.V.

Lage cilinderschroef met binnenzeskant en tapgeleiding
 Zylinderschrauben mit Innensechskant
 Hexagon socket head cap screws with centre hole and low head

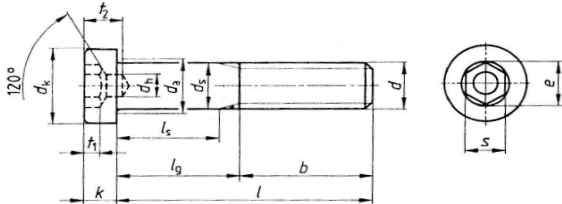

d		M4	M5	M6	M8	M10	M12	M14	M16	(M18)	M 20	(M 22)	M 24	(M 27)	M 30	(M 33)	M 36
b hulpm maat	$l \leq 125\text{mm}$	14	16	18	22	26	30	34	38	42	46	50	54	60	66	72	78
	$l > 125 \leq 200\text{mm}$	-	-	-	-	32	36	40	44	48	52	56	60	66	72	78	84
	$l > 200\text{mm}$	-	-	-	-	-	-	-	57	61	65	69	73	79	85	91	97
dk	max.=maat	7	8,5	10	13	16	18	21	24	27	30	33	36	40	45	50	54
	min.	6,78	8,28	9,78	12,73	15,73	17,73	20,67	23,67	26,67	29,67	32,61	35,61	39,61	44,61	49,61	53,54
da	max.	4,7	5,7	6,8	9,2	11,2	13,7	15,7	17,7	20,2	22,4	24,4	26,4	30,4	33,4	36,4	39,4
dh	min.=maat	2	2,5	3	4	5	6	7	8	8	10	10	12	12	15	16,5	18
	max.	2,06	2,56	3,06	4,075	5,075	6,075	7,09	8,09	8,09	10,09	10,09	12,11	12,11	15,11	16,61	18,11
ds	max.=maat	4	5	6	8	10	12	14	16	18	20	22	24	27	30	33	36
	min.	3,82	4,82	5,82	7,78	9,78	11,73	13,73	15,73	17,73	19,67	21,67	23,67	26,67	29,67	32,61	35,61
e	min.	3,44	4,58	5,72	6,86	9,15	11,43	13,72	16	25,83	28,83	31,61	34,61	38,61	43,61	48,61	52,34
k	max.=maat	2,8	3,5	4	5	6,5	7,5	8,5	10	16	19,44	19,44	21,73	21,73	25,15	27,43	30,85
	min.	2,66	3,32	3,82	4,82	6,28	7,28	8,28	9,78	10,73	11,73	12,73	13,73	15,73	17,23	19,17	21,17
s	maat	3	4	5	6	8	10	12	14	14	17	17	19	19	22	24	27
	min.	3,02	4,02	5,02	6,02	8,025	10,025	12,032	14,032	14,032	17,05	17,05	19,065	19,065	22,065	24,065	27,065
	max.	3,10	4,12	5,14	6,14	8,175	10,175	12,212	14,212	14,212	17,23	17,23	19,275	19,275	22,275	24,275	27,275
t1	maat	1,6	2	2,5	3	3,5	4	4,5	5,5	6	6,5	7	7	8,5	9	10	11,5
	min.	1,48	1,88	2,38	2,88	3,35	3,85	4,35	5,35	5,85	6,32	6,82	6,82	8,32	8,82	9,82	11,28
	max.	1,72	2,12	2,62	3,12	3,65	4,15	4,65	5,65	6,15	6,68	7,18	7,18	8,68	9,18	10,18	11,72
t2	min.	3,3	4	5	6,5	7,5	9	10	11,5	12,5	14	15	16	17	19	20	24
	max.	3,6	4,3	5,3	6,86	7,86	9,36	10,36	11,93	12,93	14,43	15,43	16,43	17,43	19,52	20,52	24,52

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.



Hetraco B.V.

www.hetraco.com ■ hetraco@hetraco.com ■ 055 303 21 80

Hoornaar 11 ■ 7317 BR Apeldoorn ■ Nederland

			M4	M5	M6	M8	M10	M12	M14	M16	(M18)	M 20	(M 22)	M 24	(M 27)	M 30	(M 33)	M 36
I																		
maat	min.	max.																
10	9,71	10,29																
12	11,65	12,35																
16	15,65	16,35																
20	19,58	20,42																
25	24,58	25,42																
30	29,58	30,42																
35	34,5	35,5																
40	39,5	40,5																
50	49,5	50,5																
60	59,4	60,6																
70	69,4	70,6																
80	79,4	80,6																
90	89,3	90,7																
100	99,3	100,7																
110	109,3	110,7																
120	119,3	120,7																
130	129,2	130,8																
140	139,2	140,8																
150	149,2	150,8																
160	159,2	160,8																
170	169,2	170,8																
180	179,8	180,8																
190	189,1	190,9																
200	199,1	200,9																

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.

