

DIN6914






HV Voorspanbout

Sechskantschrauben mit großen Schlüsselweiten für HV-Verbindungen in Stahlkonstruktionen

Hexagon bolts with large widths across flats for high tensile structural bolting

Hetraco B.V.

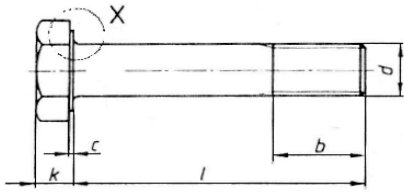

d	M12	M16	M20	M22	M24	M27	M30	M36
b	21	26	31	32	34	37	40	48
	23	28	33	34	37	39	42	50
c	min.	0,4	0,4	0,4	0,4	0,4	0,4	0,4
	max.	0,6	0,6	0,8	0,8	0,8	0,8	0,8
e min.	23,91	29,56	35,03	39,55	45,20	50,85	55,37	66,44
k	8	10	13	14	15	17	19	23
r min.	1,2	1,2	1,5	1,5	1,5	2	2	2
s	22	27	32	36	41	46	50	60

l	M12	M16	M20	M22	M24	M27	M30	M36
30								
35								
40								
45								
50								
55								
60								
65								
70								
75								
80								
85								
90								
95								
100								
105								
110								
115								
120								
125								
130								
135								
140								
145								
150								
155								
160								
165								
170								
175								
180								
185								
190								
195								
200								

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.



Hetraco B.V.

www.hetraco.com ■ hetraco@hetraco.com ■ 055 303 21 80

Hoornaar 11 ■ 7317 BR Apeldoorn ■ Nederland