


DIN910



Afdichtstop met kraag en zeskant
 Verslússchraube mit Bund und außensechskant
 Hexagon head screw plug

Hetraco B.V.

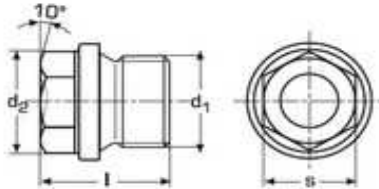

d1		DIN ISO 228	d2	l	s
DIN 13					
M 10 X 1	-	G 1/8 A	14	17	10
M 12 X 1,5	-	-	17	21	13
-	-	G 1/4 A	18	17	13
-	-	G 1/4 A	18	21	13
M 14 x 1,5	-	-	19	21	13
M 16 x 1,5	-	-	21	21	17
-	-	G 3/8 A	22	17	17
-	-	G 3/8 A	22	21	17
M 18 X 1,5	-	-	23	24	17
M 20 X 1,5	M 20 X 2	-	25	26	19
-	-	G 1/2 A	26	22	19
-	-	G 1/2 A	26	26	19
M 22 X 1,5	-	-	27	26	19
M 24 X 1,5	-	-	29	27	22
M 26 X 1,5	-	-	31	30	24
-	-	G 3/4 A	32	26	24
-	M 27 X 2	G 3/4 A	32	30	24
M 30 X 1,5	M 30 X 2	-	36	30	24
-	M 33 X 2	G 1 A	39	32	27
M 36 X 1,5	M 36 X 2	-	42	32	27
M 45 X 1,5	-	G 1 1/4 A	44	32	27
-	M 39 X 2	-	48	32	27
M42 X 1,5	M 42 X 2	G 1 1/4 A	48	33	30
M45 X 1,5	M 45 X 2	-	52	33	30
M 48 X 1,5	M 48 X 2	G 1 1/2 A	55	33	30
M52 X 1,5	M 52 X 2	-	60	33	30
-	-	G 1 3/4 A	62	40	36
-	M 56 X 2	-	64	40	36
-	M 60 X 2	G 2 A	68	40	36
-	M 64 X 2	-	72	40	36

Aan de inhoud kunnen geen rechten worden ontleend. / No rights can be derived from the information provided in this publication.



Hetraco B.V.

www.hetraco.com ■ hetraco@hetraco.com ■ 055 303 21 80

Hoornaar 11 ■ 7317 BR Apeldoorn ■ Nederland